

OpzS Series

BSB OpzS Series Lead Acid batteries are designed with a combination of die-casting Tubular positive framework and superfluous electrolyte technologies to offer a very high level of reliability and a long service life. OpzS batteries used special filter and proof design to ensure no acid fog runs over and burning proof, and also convenient examine and maintenance.

Application


Telecommunications	Medical Equipment
Cable Television	UPS
Electric Utility	Railroad Utility
Control Equipment	Photovoltaic System
Security System	Alternative Energy System

General Features



- Maintenance convenient.
- Non-Spillable construction design.
- Transparent containers, convenient to observe.
- Special filter installation for acid fog proof.
- High quality and high reliability.
- Super long service life.
- Special pole sealed technology.
- Super reliability.

Construction


Component	Raw material	Terminal	Copper
Positive	Lead dioxide	Separator	Rubber-PVC
Negative	Lead	Electrolyte	Sulfuric acid
Container	AS		
Cover	AS		

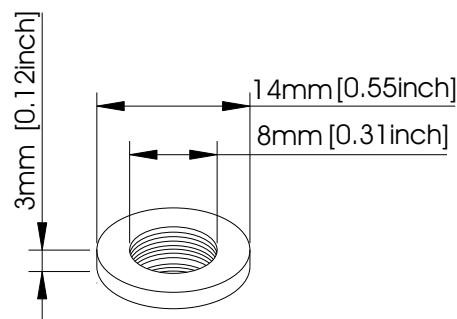

Terminal Dimensions



Battery Model	OPzS 2-1875			
Designed Floating Life	15 Years			
Capacity(25°C)	24HR(93.75A,1.85V)	10HR(187.5A,1.80V)	5HR(315A,1.77V)	1HR(930A,1.67V)
	2250AH	1875AH	1575AH	930AH
Dimensions	Length	Width	Height	Total Height
	399mm(15.71inch)	214mm(8.27inch)	771mm(30.35inch)	826mm(31.52inch)
Approx. Weight	Without electrolyte:113 Kg (249.2 lbs) with electrolyte: 158 Kg (348.4 lbs)			
Internal Resistance	Full charged at 25°C: 0.00055 Ohm			
Self Discharge	3% of capacity declined per month at (25°C)			
Capacity Affected by Temp.(20HR)	40°C	25°C	0°C	-15°C
	102%	100%	85%	65%
Charge Voltage(25°C)	Cycle use		Float use	
	2.35V-2.4V(-5mV/ °C), max. Current: 281A		2.24V(-3.3mV/ °C)	

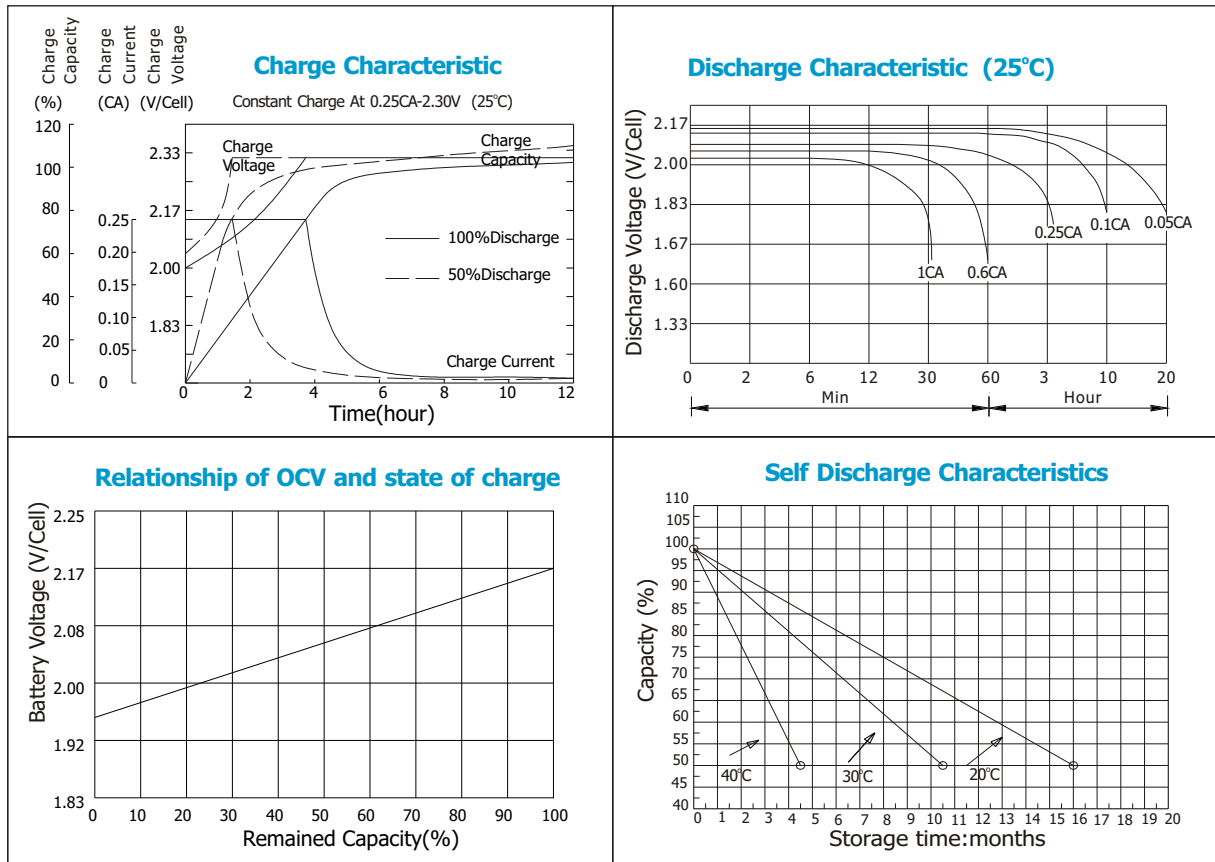

Constant current discharge ratings-amperes at 25°C

TIME	1HR	3HR	5HR	10HR	24HR	48HR	72HR	96HR	120HR	240HR
CUT-OFF VOLTAGE	1.67	1.75	1.77	1.80	1.85	1.85	1.85	1.85	1.85	1.85
CAPACITY(AH)	930	1395	1575	1875	2250	2512	2625	2630	2640	2715

Constant power discharge ratings-watts at 25°C

TIME	1HR	3HR	5HR	10HR	24HR	48HR	72HR	96HR	120HR	240HR
CUT-OFF VOLTAGE	1.67	1.75	1.77	1.80	1.85	1.85	1.85	1.85	1.85	1.85
CAPACITY(WH)	1228	2358	2615	2981	3285	3668	3833	3840	3854	3964