

Opzs Series

BSB Opzs Series Lead Acid batteries are designed with a combination of die-casting Tubular positive framework and superfluous electrolyte technologies to offer a very high lever of reliability and a long service life. Opzs batteries used special filter and proof design to ensure no acid fog runs over and burning proof, and also convenient examine and maintenance.

Application

Telecommunications	Medical Equipment
Cable Television	UPS
Electric Utility	Railroad Utility
Control Equipment	Photovoltaic System
Security System	Alternative Energy System




General Features




- Maintenance convenient.
- Non-Spillable construction design.
- Transparent containers, convenient to observe.
- Special filter installation for acid fog proof.
- High quality and high reliability.
- Super long service life.
- Special pole sealed technology.
- Super reliability.

Construction


Component	Raw material	Terminal	Copper
Positive	Lead dioxide	Separator	Rubber-PVC
Negative	Lead	Electrolyte	Sulfuric acid
Container	AS		
Cover	AS		

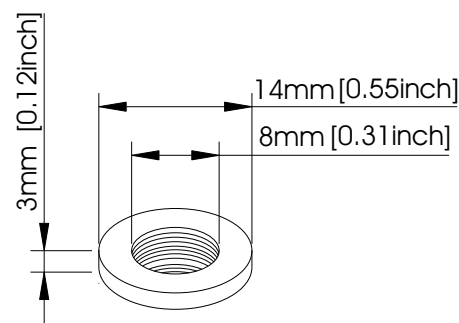

Terminal Dimensions

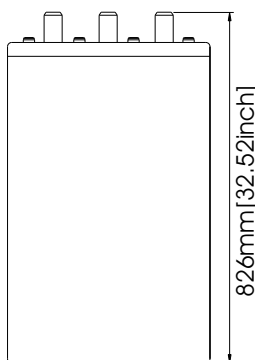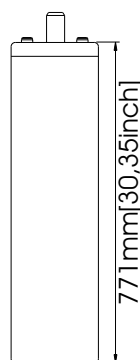

Battery Model	OPzS 2-2250			
Designed Floating Life	15 Years			
Capacity(25°C)	24HR(112.5A,1.85V)	10HR(225A,1.80V)	5HR(387A,1.77V)	1HR(1125A,1.67V)
	2700AH	2250AH	1935AH	1125AH
Dimensions	Length	Width	Height	Total Height
	487mm(19.17inch)	212mm(8.53inch)	771mm(30.35inch)	826mm(32.52inch)
Approx. Weight	Without electrolyte:142 Kg (313.1 lbs) with electrolyte: 195 Kg (430 lbs)			
Internal Resistance	Full charged at 25°C: 0.0005 Ohm			
Self Discharge	3% of capacity declined per month at (25°C)			
Capacity Affected by Temp.(20HR)	40°C	25°C	0°C	-15°C
	102%	100%	85%	65%
Charge Voltage(25°C)	Cycle use		Float use	
	2.35V-2.4V(-5mV/ °C), max. Current: 337.5A		2.24V(-3.3mV/ °C)	

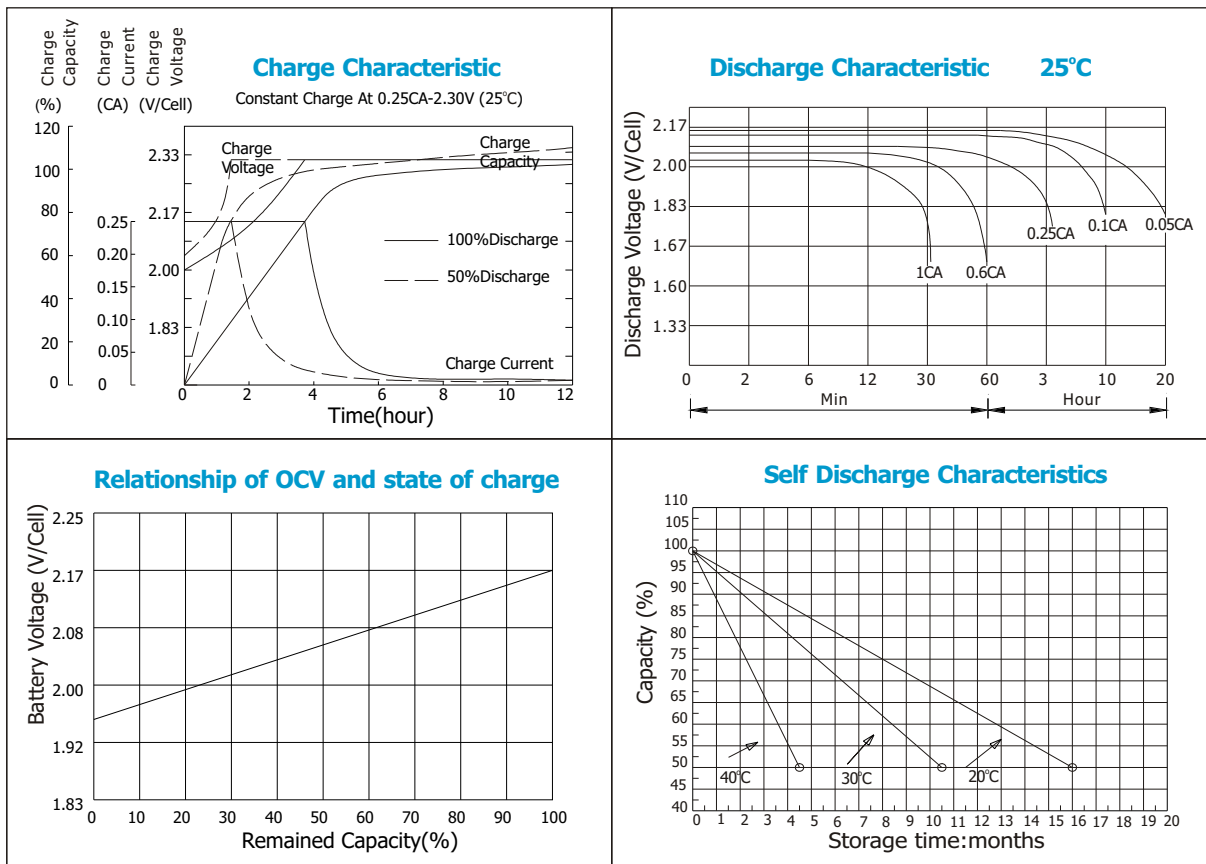

Constant current discharge ratings-amperes at 25°C

TIME	1HR	3HR	5HR	10HR	24HR	48HR	72HR	96HR	120HR	240HR
CUT-OFF VOLTAGE	1.67	1.75	1.77	1.80	1.85	1.85	1.85	1.85	1.85	1.85
CAPACITY(AH)	1125	1686	1935	2250	2700	3015	3150	3160	3170	3230

Constant power discharge ratings-watts at 25°C

TIME	1HR	3HR	5HR	10HR	24HR	48HR	72HR	96HR	120HR	240HR
CUT-OFF VOLTAGE	1.67	1.75	1.77	1.80	1.85	1.85	1.85	1.85	1.85	1.85
CAPACITY(WH)	1485	2866	3212	3578	3942	4402	4599	4614	4628	4716