

Opzs Series

BSB Opzs Series Lead Acid batteries are designed with a combination of die-casting Tubular positive framework and superfluous electrolyte technologies to offer a very high lever of reliability and a long service life. Opzs batteries used special filter and proof design to ensure no acid fog runs over and burning proof, and also convenient examine and maintenance.

Application


Telecommunications	Medical Equipment
Cable Television	UPS
Electric Utility	Railroad Utility
Control Equipment	Photovoltaic System
Security System	Alternative Energy System

General Features



- Maintenance convenient.
- Non-Spillable construction design.
- Transparent containers, convenient to observe.
- Special filter installation for acid fog proof.
- High quality and high reliability.
- Super long service life.
- Special pole sealed technology.
- Super reliability.

Construction


Component	Raw material	Terminal	Copper
Positive	Lead dioxide	Separator	Rubber-PVC
Negative	Lead	Electrolyte	Sulfuric acid
Container	AS		
Cover	AS		

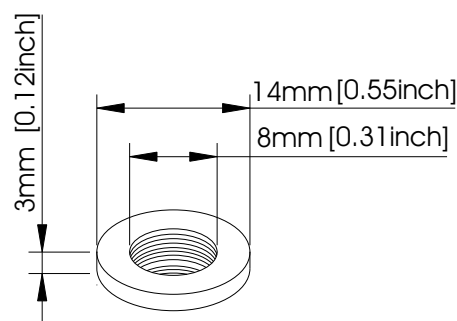

Terminal Dimensions

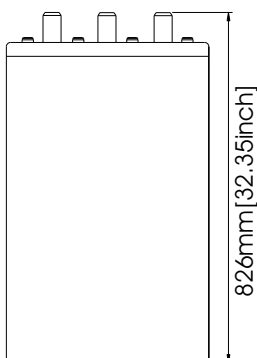

Battery Model	OPzS 2-3000			
Designed Floating Life	15 Years			
Capacity(25°C)	24HR(150A,1.85V)	10HR(300A,1.80V)	5HR(504A,1.77V)	1HR(1488A,1.67V)
	3600AH	3000AH	2520AH	1488AH
Dimensions	Length	Width	Height	Total Height
	576mm(22.68inch)	212mm(8.35inch)	771mm(30.35inch)	826mm(32.35inch)
Approx. Weight	Without electrolyte:179 Kg (394.7 lbs) with electrolyte: 242 Kg (533.6 lbs)			
Internal Resistance	Full charged at 25°C: 0.00045 Ohm			
Self Discharge	3% of capacity declined per month at (25°C)			
Capacity Affected by Temp.(20HR)	40°C	25°C	0°C	-15°C
	102%	100%	85%	65%
Charge Voltage(25°C)	Cycle use		Float use	
	2.35V-2.4V(-5mV/ °C), max. Current: 450A		2.24V(-3.3mV/ °C)	

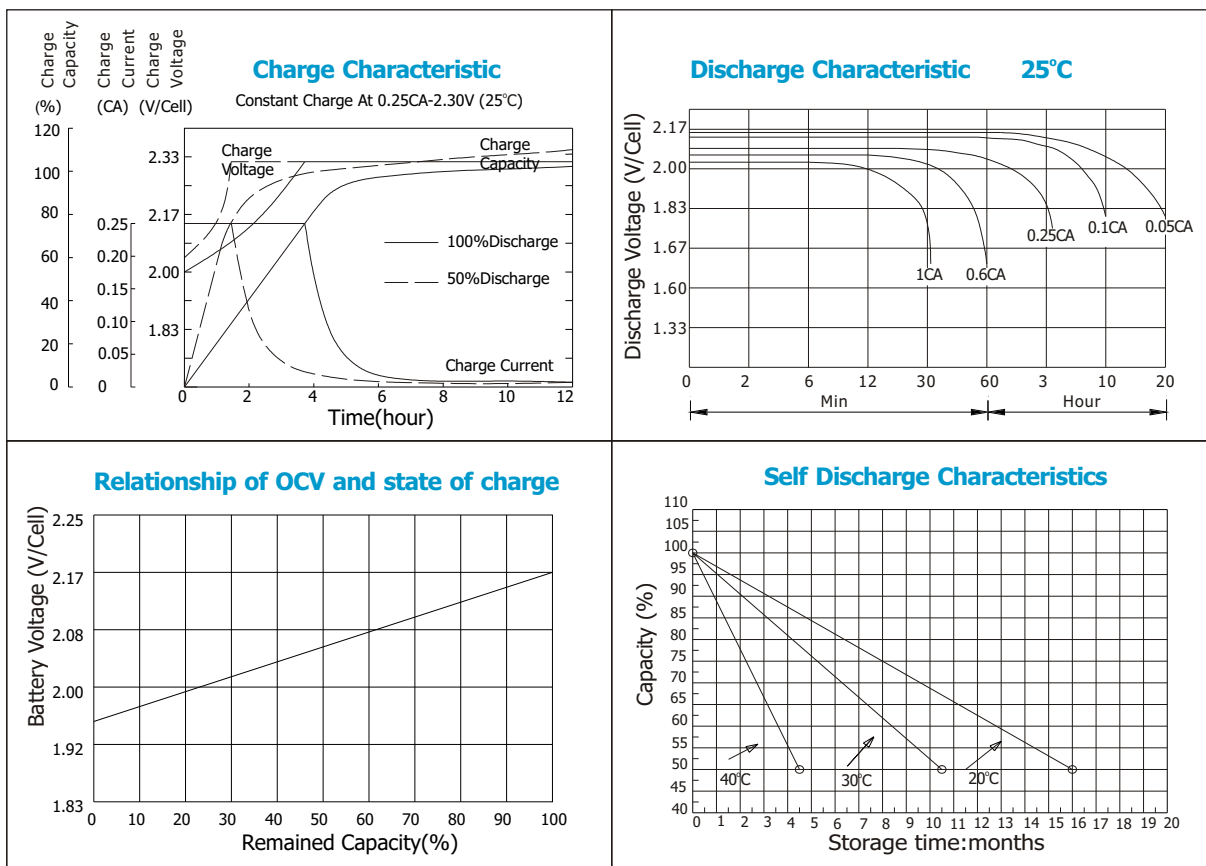

Constant current discharge ratings-amperes at 25°C

TIME	1HR	3HR	5HR	10HR	24HR	48HR	72HR	96HR	120HR	240HR
CUT-OFF VOLTAGE	1.67	1.75	1.77	1.80	1.85	1.85	1.85	1.85	1.85	1.85
CAPACITY(AH)	1488	2232	2520	3000	3600	4020	4200	4220	4250	4330

Constant power discharge ratings-watts at 25°C

TIME	1HR	3HR	5HR	10HR	24HR	48HR	72HR	96HR	120HR	240HR
CUT-OFF VOLTAGE	1.67	1.75	1.77	1.80	1.85	1.85	1.85	1.85	1.85	1.85
CAPACITY(WH)	2098	3527	3982	4560	5004	5588	5838	5866	5908	6019